

POS - Datenblatt

Multi POS C-P105



C-Novation Pay

secure cryptopayments



C-Novation Pay

secure cryptopayments




Mobiles POS Terminal

Multi POS C-P105


Technische Daten

Android Handheld Terminal C-P105	
CPU	Quard core A53
OS	ANDROID 5.1
Memory	1GB DDR3
Storage Device	8GB EMMC
G-sensor	No
LCD	HD, 7-inch, 1280*800
TP	Capacity touch screen
Network	GSM:850/900/1900/2100MHZ
	CDMA
	WCDMA: 850/900/1900/2100MHZ
	TD-SCDMA :B34/B39
	4G(LTE):TD-LTE /FDD-LTE
Wifi	WIFI802.11b/g/n 2.4G/5.8G
GPS	Yes
A-GPS	Yes
Bluetooth	Bluetooth 4.0
Camera	5M
Battery	7.4V 4000MAH
Printer.	.58MM thermal printer
	.Support to print 1D barcode:
	.EAN13,EAN8, CODE39, CODE93, CODE128, ITF, CODEBAR, UPC-A, UPC-E.
	.Support to print QR code.
	.Support to print picture.
NFC	.Support Arial and Song font face.
	.Support multi language printing: Chinese, German, Indonesian, Malay,Catalonian, Czech, Danish, Estonian, English, Spanish, Tagalog, French, Croatian, Latvian, Lithuanian, Hungarian, Dutch, Norwegian, Polish, Portuguese, Romanian, Slovak, Slovenian, Finnish, Swedish, Vietnamese, Turkish, Greek, Bulgarian, Kazakh, Russian etc.
	.13.56MHZ ISO/IEC 14443 TYPE A/B.
	.Support the bank card which accord with EMV4.1 or PBOC3.0 certificate.
	.Mifare
Chip cards	.Card reading distance:0-40mm
	.ISO7816 standards
	.Support the bank card which accord with EMV4.1 or PBOC3.0 certificate.
	.CPU card, T=0/T=1
	.Visa card, Master card, American Express card.
Magnetic stripe card	.IC card contact life: Three hundred thousand times
	1 / 2 / 3 track, two-way card(optional)
Barcode Scan (optional)	Support 1d/2d barcode scan: QRCODE, EAN13,EAN8, CODE39, CODE93, CODE128, ITF, CODEBAR, UPC-A, UPC-E
Certifications	Comply with EMV Level1, EMV Level2, FCC, CE, Rohs
Operating Temperature	°C 0 -50
storage Temperature	°C -20-60

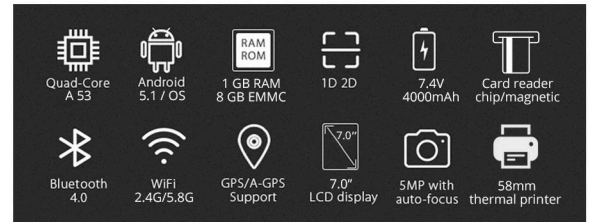

No Communication Limits

With support for 3G/4G, Wifi, Bluetooth 4.0, GPS, A-GPS, NFC, Chip-Cards, Magnetic stripe cards, Barcode Scan, 58MM thermal printer

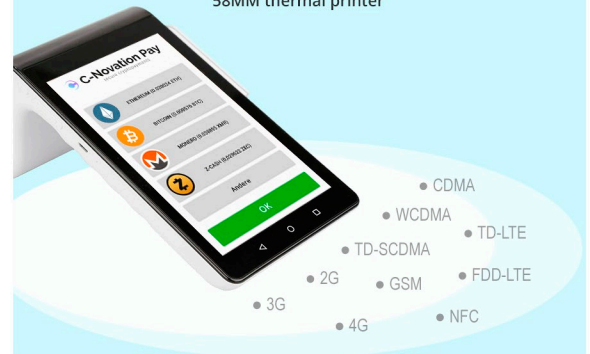

Chip cards


- ISO7816 standards
- Support the bank card which accord with EMV4.1 or PBOC3.0 certificate.
- CPU card, T=0/T=1
- Visa card, Master card, American Express card.
- IC card contact life: Three hundred thousand times

Magnetic stripe card

- 1 / 2 / 3 track, two-way card(optional)

NFC

- 13.56MHZ ISO/IEC 14443 TYPE A/B.
- Support the bank card which accord with EMV4.1 or PBOC3.0 certificate.
- Mifare
- Card reading distance:0-40mm

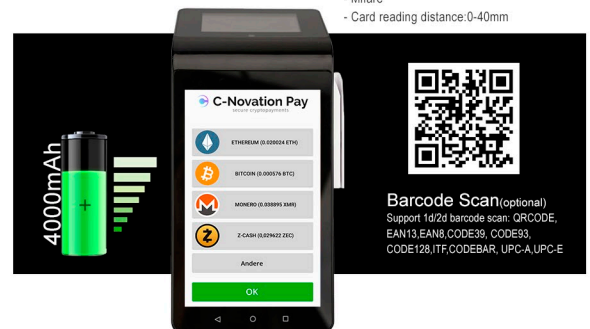

2 Displays
7" + Customer Display

5M camera
Barcode scanning

NFC
Future identifier

Zahlungen mit Kryptowährungen sind in Ladengeschäften in Zukunft nicht mehr wegzudenken.

Nutzen Sie Ihren Vorteil rechtzeitig! Wir sind Ihr kompetenter Partner im Kryptobereich.

Bei Interesse beraten wir Sie gerne, rufen Sie uns an!

Servicetelefon: +49 581 21299141 | www.c-novation-pay.com